







mm(inch)

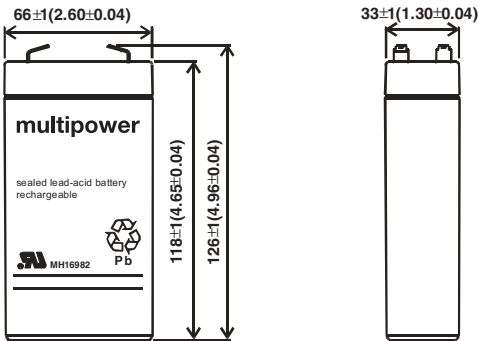

F1 (FASTON TAB NO. 187)



(v) FOR 6V BATTERY Discharge Time VS. Discharge Current (25°C)

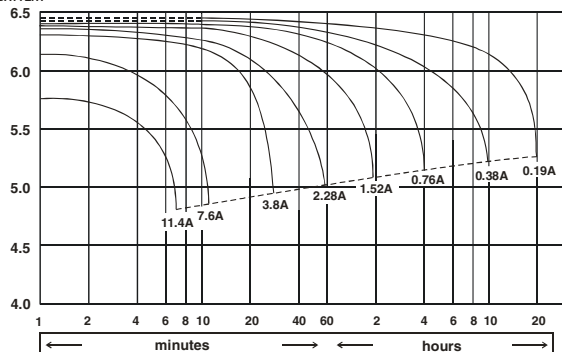

MP3,8-6

Nominal Voltage (V) 6V

Nominal Capacity

20hour rate (0.19A to 5.25V)	3.8Ah
10hour rate (0.38A to 5.25V)	3.8Ah
5hour rate (0.646A to 5.25V)	3.23Ah
1C (3.8A to 4.80V)	1.71Ah
3C (11.4A to 4.80V)	1.368Ah

Weight 0.735kg(1.62Lbs.)

Internal Resistance (at 1KHz) 18 mΩ

Maximum Discharge Current for 30 seconds :

76A

Maximum Discharge Current for 5 seconds :

152A

Operating Temperature Range

Charge	0°C (32°F) to 40°C (104°F)
Discharge	-15°C (5°F) to 50°C (122°F)
Storage	-15°C (5°F) to 40°C (104°F)

Charge Retention (shelf life) at 20°C (68°F)

1 month	92%
3 month	90%
6 month	80%

Charging Methods at 25°C (77°F)

Cycle use:

Charging Voltage 7.20 to 7.50V
Maximum Charging Current: 1.14A

Standby use:

Float Charging Voltage 6.75 to 6.90V

Life expectancy :

Cycle Use:

- 100% depth of discharge 200 cycles
- 80% depth of discharge 225 cycles
- 50% depth of discharge 500 cycles

Standby Use: 3-5 years

Case Material

ABS

(Option: 94-HB & 94V-0 flame retardant case)

Terminal

F1