

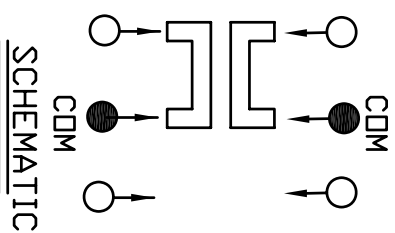
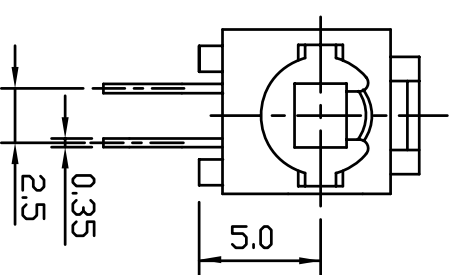


P.C.B HOLE DETAIL

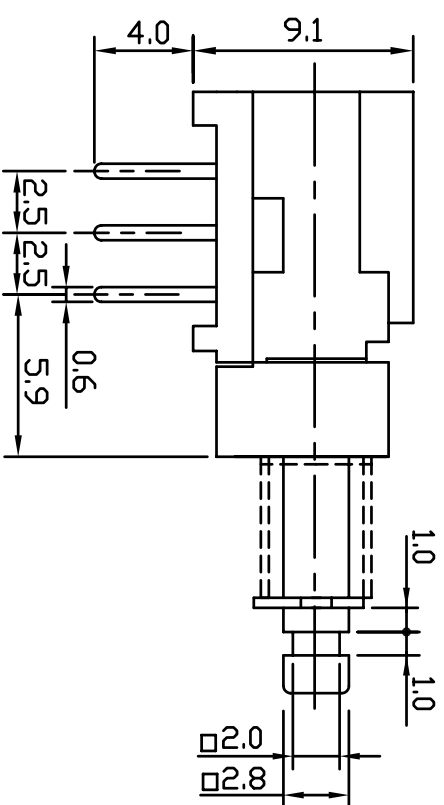

1. Rated Voltage	DC30V	7. Mechanical Life	30000 CYCLES
2. Rated Current	0.1A	8. Electrical Life	10000 CYCLES
3. Contact Resistance	≤50mΩ	9. Position Travel	2.0±0.2mm
4. Operating Force	230±50gf	10. Operating Temper	-10° C - +60° C
5. Insulation Resistance	≥100MΩ DC250V	11. Shipping Temper	<85%RH
6. Withstand Voltage	AC250V 1 minute	NOTE:TOLERANCES UNLESS OTHERWISE SPECIFIED:±.012/0.3 (in/mm)	

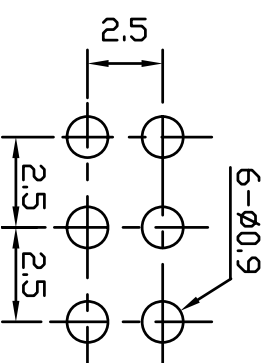

REVISION	DESCRIPTION	REVISED BY	TOLERANCES	ANGLE	SCALE	UNIT	PART NAME	PART NO	DWG NO
△			ERIC	1:1	mm	PS909L SPEC DRAWING		WS0434A	
△		吳美玉	DESIGNED BY						
△		吳美玉	CHECKED BY						
△	2006.08.15 換新圖框,重新出圖	吳美玉	APPROVED BY		DATE	2006.08.15	PART NO	PS909L-22	