



REV.	DESCRIPTION OF MODIFY	DATE

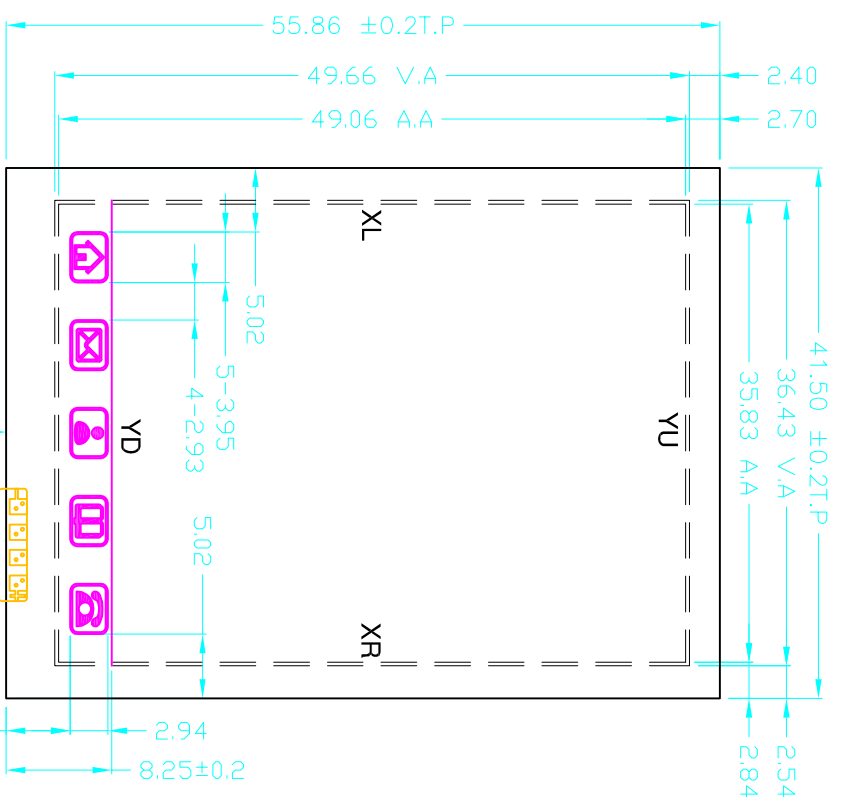

ITO Film 0.188j à 0.02 mm

ITO Glass 0.70 mm

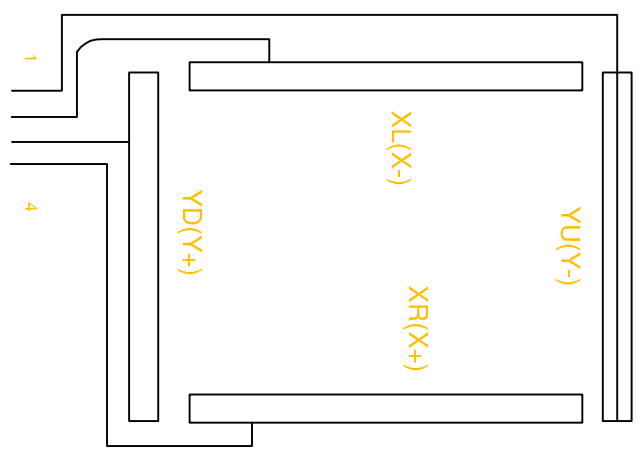

PIN OUT	
PIN1	YU
PIN2	XL
PIN3	YD
PIN4	XR

D22107 上面更改ICON (D22021TP)

- SPEC:
1. ITO Film+ITO Glass+FPC. Thickness:1.20mm  
ITO Film: High resistance. 0.188mm(single)  
ITO Glass: High resistance.0.7mm
  2. Power supply(max): DC 5V
  3. Insulative resistance: >=20M OHM@DC 25V
  4. Linear tolerance:<=1.5%
  5. Transparency: >=80%
  6. Operation pressure: 30~100g
  7. Touch resistance : 200~900 OHM
  8. Hold time : <15ms
  9. surface rigidity: 3H
  10. Operation temp. : -10° ~+50° .<=90RH
  11. Store Temp. : -20° ~+70° .<=90RH
  12. Umarm tolerance:±0.2mm

DRAWN BY :			<b>WINCOM TECH CO.,LTD</b>	
CHECKED BY :				
TEL: (0755)26154265		<b>DWG NO. : D22135H</b>		REV: <b>A</b>
FAX: (0755)83308659				SHEET:
jiangyao@wincomlcd.com				SCALE:
		UNITS	MM	
		TITL		