

## SPECIFICATIONS

- CONTACT RATING:** Dependent upon contact material.
- MECHANICAL LIFE:** 40,000 make-and-break cycles.
- CONTACT RESISTANCE:** 10mΩ max. initial @ 2-4VDC  
100mA for both silver and gold plated contacts.
- INSULATION RESISTANCE:** 1,000MΩ min.
- DIELECTRIC STRENGTH:** 1,000 V RMS@sea level.
- OPERATING TEMPERATURE:** -30°C to 85°C.

## MATERIALS

- CASE:** Diallyl phthalate (DAP) (UL94v-0).
- ACTUATOR:** Brass,chrome plated.
- BUSHING:** Brass,nickel plated.
- HOUSING:** Stainless Steel.
- SWITCH SUPPORT:** Brass,tin plated.
- TERMINAL/CONTACT:** Silver or gold plated.(See Page 11)

## HOW TO ORDER

MODEL NO.	ACTUATOR	BUSHING	TERMINATIONS	CONTACT MATERIAL	SEAL	ROHS SOLDERING
<p>MODEL NO.</p> <p><b>1MS1</b> SP On-None-On</p> <p><b>1MS2</b> SP On-None-Mom</p> <p><b>1MS3</b> SP On-Off-On</p> <p><b>1MS4</b> SP Mom-Off-Mom</p> <p><b>1MS5</b> SP On-Off-Mom</p> <p><b>1MD1</b> DP On-None-On</p> <p><b>1MD2</b> DP On-None-Mom</p> <p><b>1MD3</b> DP On-Off-On</p> <p><b>1MD4</b> DP Mom-Off-Mom</p> <p><b>1MD5</b> DP On-Off-Mom</p> <p><b>1MD6</b> DP On-On-On</p> <p><b>1MD7</b> DP MOM-On-Mom</p> <p><b>1MD8</b> DP On-On-Mom</p> <p><b>1M31</b> 3P On-None-On</p> <p><b>1M32</b> 3P On-None-Mom</p> <p><b>1M33</b> 3P On-Off-On</p> <p><b>1M34</b> 3P Mom-Off-Mom.</p> <p><b>1M35</b> 3P On-Off-Mom</p> <p><b>1M41</b> 4P On-None-On</p> <p><b>1M42</b> 4P On-None-Mom</p> <p><b>1M43</b> 4P On-Off-On</p> <p><b>1M44</b> 4P Mom-Off-Mom</p> <p><b>1M45</b> 4P On-Off-Mom</p> <p><b>1M46</b> 4P On-On-On</p> <p><b>1M47</b> 4P MOM-On-Mom</p> <p><b>1M48</b> 4P On-On-Mom</p>	<p>ACTUATOR</p> <p><b>T1</b> 10.41 high</p> <p><b>T2</b> 5.08 high</p> <p><b>T3</b> 13.97 high</p> <p><b>T4</b> 16.26 high</p> <p><b>T5</b> 21.34 high</p> <p><b>T6</b> Flatted,anti-rotation</p> <p><b>T61</b> Flatted,anti-rotation</p> <p><b>T62</b> Lever handle with cap</p> <p>13.49 high</p> <p><b>T63</b> Flatted,anti-rotation</p> <p>6.35 high</p> <p><b>T7</b> 12.37 high,15/32 bushing</p> <p><b>T8</b> 17.56 high,15/32 bushing</p> <p><b>T9</b> Plastic,21.3 high</p> <p><b>TA</b> 26.30 high lever handle</p> <p>with cap,15/32 bushing</p> <p><b>T11</b> Plastic,12.2 high</p> <p><b>TL1</b> Locking lever 16.00 high</p> <p><b>TL2</b> Locking lever 16.26 high</p> <p><b>TL3</b> Locking lever 17.28 high</p>	<p>BUSHING</p> <p><b>B1</b> 8.89 high,keyway (thd std)</p> <p><b>B2</b> 8.89 high,keyway (non-thd)</p> <p><b>B3</b> 7.10 high,keyway (thd)</p> <p><b>B4</b> 7.10 high,keyway (non-thd)</p> <p><b>B5</b> 7.52 high,flat (torque)</p> <p><b>B6</b> 8.00 high,keyway (torque)</p> <p><b>B7</b> 8.89 high,flat (thd std)</p> <p><b>B8</b> 8.89 high,keyway (metric thd)</p> <p><b>B9</b> 7.52 high,flat (splash proof)</p> <p><b>B11</b> 7.55 high,keyway (thd std)</p> <p><b>B12</b> 7.55 high,keyway (non-thd)</p> <p><b>B13</b> 11.38 high,keyway (15/32 bushing)</p> <p><b>B14</b> 11.90 high,flat (splash proof)</p> <p><b>B15</b> 7.55 high,flat (thd std)</p> <p><b>B16</b> 7.55 high,flat (non-thd)</p> <p><b>B17</b> 3.50 high,keyway</p> <p><b>B18</b> 11.38 high,keyway (15/32 bushing)</p> <p><b>B20</b> 11.38 high,keyway (15/32 bushing)</p> <p><b>B25</b> 8.00 high,keyway,locking lever (thd )</p> <p><b>B26</b> 8.00 high,keyway,locking lever (non-thd)</p>	<p>TERMINATIONS</p> <p><b>M1</b> Solder Lug</p> <p><b>M2</b> PC thru-hole</p> <p><b>M3</b> Quick Connect</p> <p><b>M5-1</b> 18.70 high, wire wrap</p> <p><b>M5-2</b> 24.20 high, wire wrap</p> <p><b>M5-3</b> 10.55 high, wire wrap</p> <p><b>M5-4</b> 26.97 high, wire wrap</p> <p><b>M6</b> Right angle, PC thru-hole</p> <p><b>M6N</b> Right angle, snap-in, PC thru-hole</p> <p><b>M7</b> Vertical right angle, PC thru-hole</p> <p><b>VS2</b> 11.68 high, V-bracket</p> <p><b>V2N</b> 11.68 high, snap-in V-bracket</p> <p><b>VS3</b> 16.00 high, V-bracket</p> <p><b>VS4</b> 11.68 high, V-bracket</p> <p><b>VS5</b> 16.00 high, V-bracket</p>	<p>CONTACT MATERIAL</p> <p><b>Q</b> Silver</p> <p><b>R</b> Gold</p> <p><b>G</b> Gold,pure-tin</p> <p><b>S</b> Silver,pure-tin</p> <p><b>C</b> Gold over silver</p> <p><b>K</b> Gold over silver,pure-tin</p>	<p>SEAL</p> <p><b>E</b> EPOXY (std)</p> <p><b>N</b> NO EPOXY</p>	<p>ROHS SOLDERING</p> <p><input type="checkbox"/> Rohs Compliant</p> <p><input type="checkbox"/> S Rohs &amp; Lead Free</p>

**SWITCH FUNCTION**




NO. POLES	UL/CSA MODEL NO.	MODEL NO.	SWITCH FUNCTION			CONNECTED TERMINALS / SCHEMATIC		
			POS.1	POS.2	POS.3	POS.1	POS.2	POS.3
SP	Q1111	1MS1	ON	NONE	ON		N/A	
	Q1112	1MS2	ON	NONE	MOM	2-3		2-1
	Q1113	1MS3	ON	OFF	ON			
	Q1114	1MS4	MOM	OFF	MOM		OPEN	
	Q1115	1MS5	ON	OFF	MOM			
DP	Q1121	1MD1	ON	NONE	ON		N/A	
	Q1122	1MD2	ON	NONE	MOM	2-3,5-6		2-1,5-4
	Q1123	1MD3	ON	OFF	ON			
	Q1124	1MD4	MOM	OFF	MOM		OPEN	
	Q1125	1MD5	ON	OFF	MOM			
	Q1126	1MD6	ON	ON	ON			
	▲ Q1127	1MD7	MOM	ON	MOM	2-3,5-6	2-3,5-4	2-1,5-4
	▲ Q1128	1MD8	ON	ON	MOM			
3P	Q1131	1M31	ON	NONE	ON		N/A	
	Q1132	1M32	ON	NONE	MOM	2-3,5-6,8-9		2-1,5-4,8-7
	Q1133	1M33	ON	OFF	ON			
	Q1134	1M34	MOM	OFF	MOM		OPEN	
	Q1135	1M35	ON	OFF	MOM			
4P	Q1141	1M41	ON	NONE	ON		N/A	
	Q1142	1M42	ON	NONE	MOM	2-3,5-6,8-9,11-12		2-1,5-4,8-7,11-10
	Q1143	1M43	ON	OFF	ON			
	Q1144	1M44	MOM	OFF	MOM		OPEN	
	Q1145	1M45	ON	OFF	MOM			
	Q1146	1M46	ON	ON	ON			
	▲ Q1147	1M47	MOM	ON	MOM	2-3,5-6,8-9,11-12	2-3,5-4,8-9,11-10	2-1,5-4,8-7,11-10
	▲ Q1148	1M48	ON	ON	MOM			

MOM=MOMENTARY

▲ Please check the availability in advance before order




**POLE OPTIONS**

**SPDT**

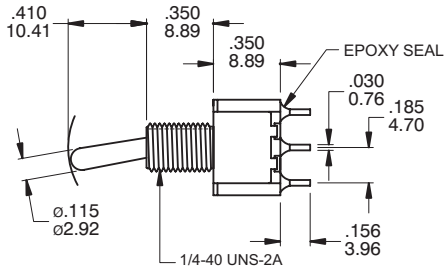




Part No. Shown : 1MS1T1B1M1QE

**DPDT**

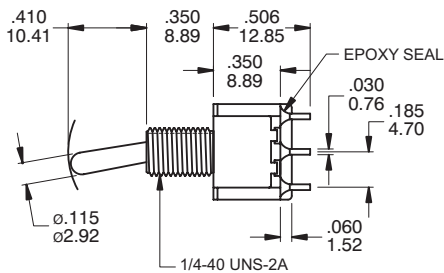




Part No. Shown : 1MD1T1B1M1QE

**3PDT**

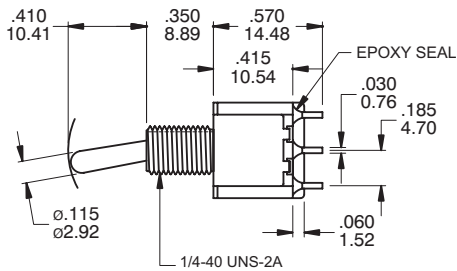

Part No. Shown : 1M31T1B1M1QE

**4PDT**

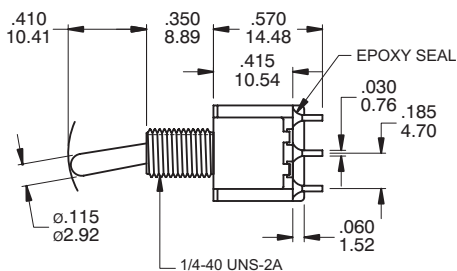





Part No. Shown : 1M41T1B1M1QE

## 3-WAY SWITCHES

### 3-WAY WIRING DIAGRAM SCHEMATICS



#### SINGLE POLE, 3 POSITION

Model No.	POS 1	POS 2	POS 3
1MD6	ON	ON	ON
Term. Comm.	2-3,5-6	2-3,5-4	2-1,5-4

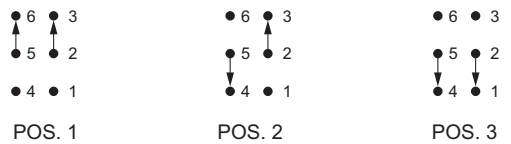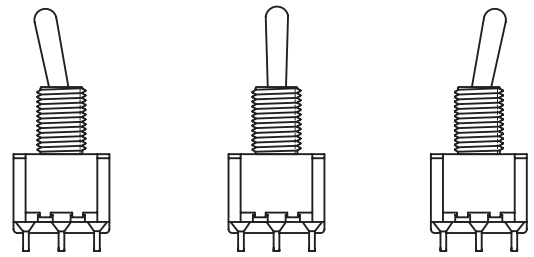


#### DOUBLE POLE, 3 POSITION

Model No.	POS 1	POS 2	POS 3
1M46	ON	ON	ON
Term. Comm.	2-3,5-6 8-9,11-12	2-3,5-4 8-9,11-10	2-1,5-4 8-7,11-10

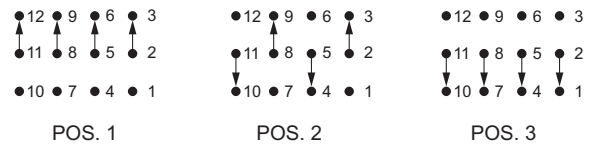


## ACTUATOR OPTIONS


#### T1 STD




#### T2




#### T3



#### T4




#### T5




**NOTE** T1 ~ T5 Actuator shown with standard B1 Bushing ;  
 Add .070 (1.78) for B3 Bushing ;  
 Subtract .020 (0.51) for B6 Bushing ;  
 Std for M1 , M2 Terminal sub .016 (0.40) for M6 , M7 , VSX


#### T6 FLATTED WITH ANTIROTATION




#### T61



#### T62




#### T63




**NOTE** T6,T6-1,T6-2 ,T63 use with B11, B12, B15, B16 bushing only.

## T7

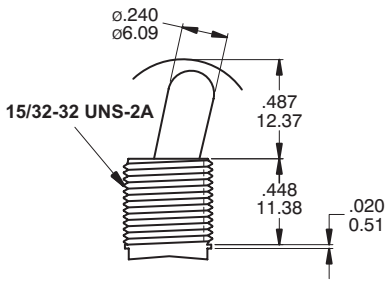


Use with B13 bushing  
Use with B18,B20 the lever is antirotation and the size of lever is 13.00mm

## T8

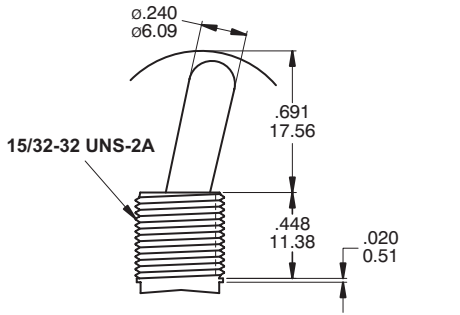


Use with B13 bushing  
Use with B18,B20 the lever is antirotation and the size of lever is 18.00mm

## T9

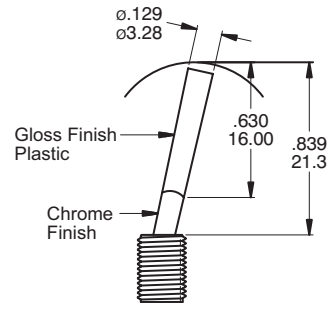


B1 / B2 bushing std with black and red color only ( std. )

## TA PLASTIC BLACK

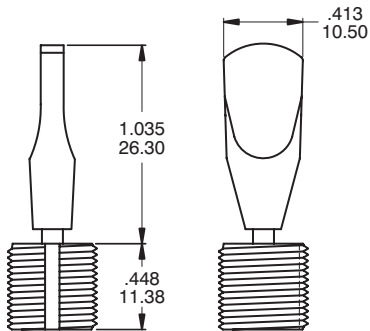

Use with B18 bushing only

## T11

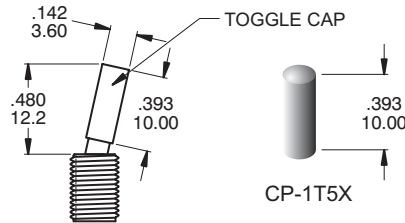


**NOTE** T11 Actuator shown with standard B1 Bushing ;  
Add .070 ( 1.78 ) for B3 Bushing ;  
Subtract .020 ( 0.51 ) for B6 Bushing.  
Std for M1.M2 Terminal sub .016 (0.40 ) for M6.M7.VSX

### Plastic No.Color :


ITEM NO	COLOR
1	White
2	Black (Std)
3	Red
4	Orange
5	Yellow
6	Green
7	Blue
8	Brown
9	Gray

T6-2 , TA , T9 , T11  
ACTUATOR ONLY



## TL1B25

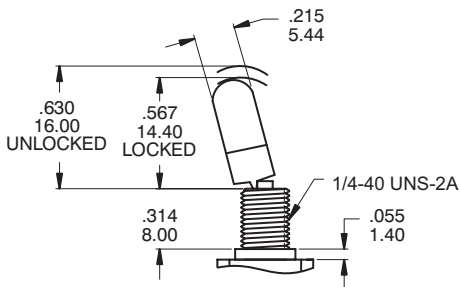

## TL2B25

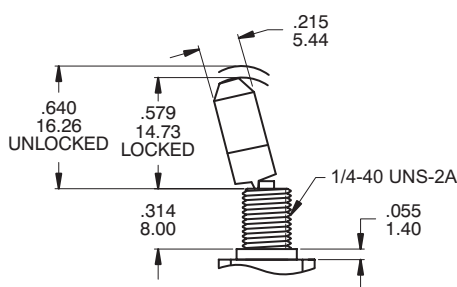


## TL3B25

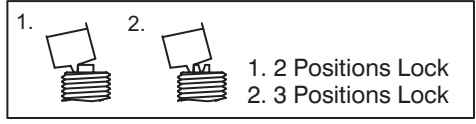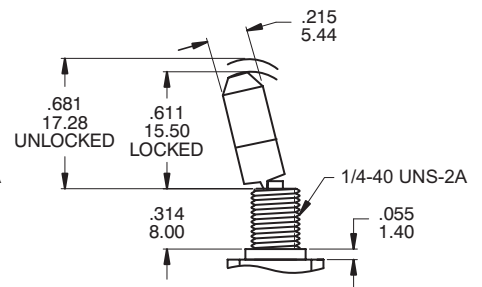


## BUSHING OPTIONS

### B1 THD STD B2 NON-THD

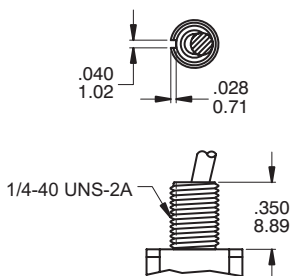


### B3 THD B4 NON-THD




B4 is standard for M6, M7 and VS2~5 termination options.


### B5 HIGH TORQUE

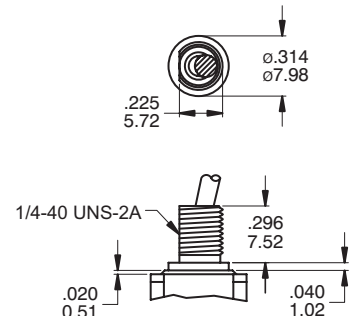


**B6 HIGH TORQUE**

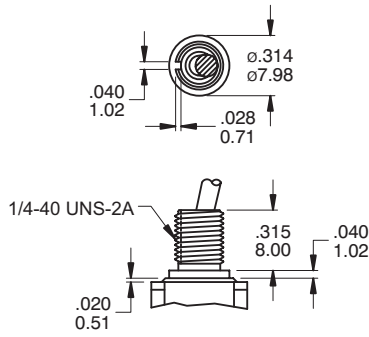



**B7 THD STD**

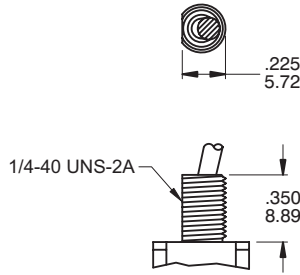


**B8 METRIC THD**



**B9 SPLASH PROOF**

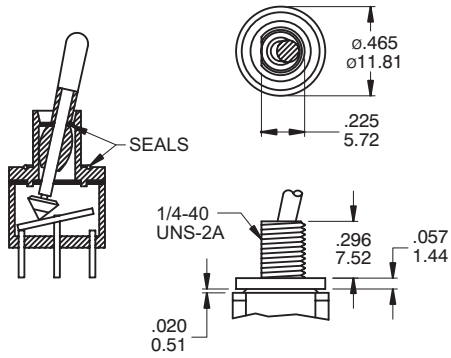


**CP-1TEB**

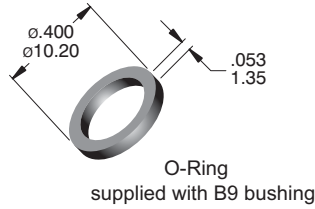


**B11 THD STD**

**B12 NON-THD**

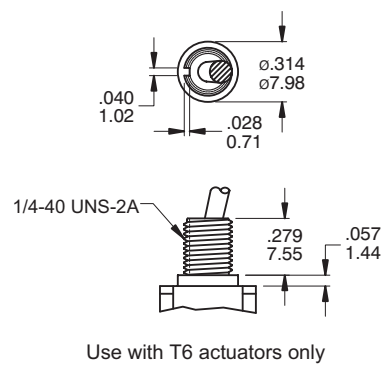


Use with T6 actuators only

**B15 THD STD**  
**B16 NON-THD**

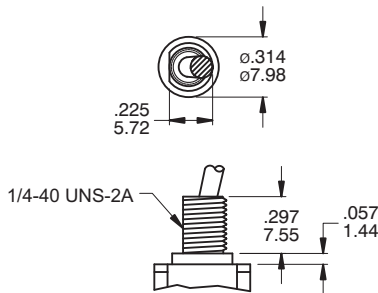


Use with T6 actuators only

**B17**




**B13**

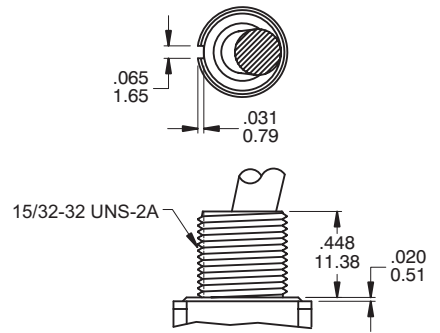


Use with T7, T8 actuators only  
B13 Bear strength from top of actuator up to 10kg aside up to 15kg

**B14 SPLASH PROOF**

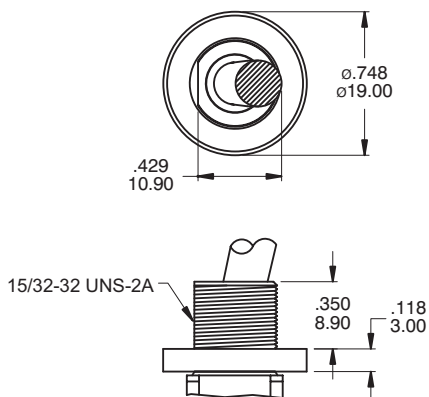


Use with T7, T8 actuators only

**B18**

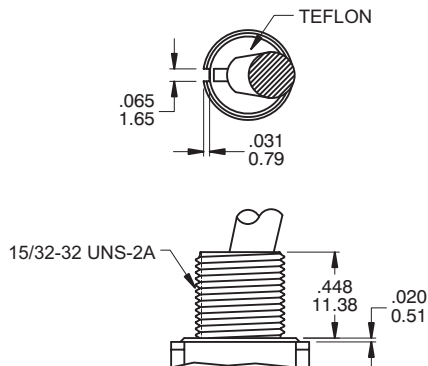

Use with T7, T8 and T10 actuators only with Plastic (Teflon) Insert


**B20**

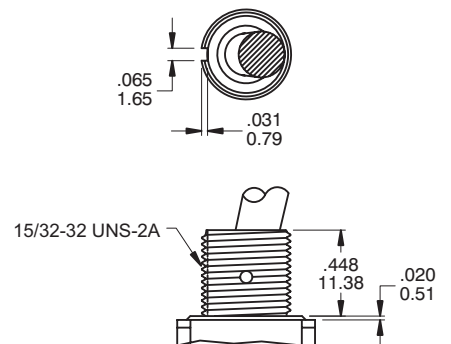


Use with T7, T8 and T10 actuators only

B18, B20 Bear strength from top of actuator up to 20kg aside up to 15kg



**PANEL MOUNTING**

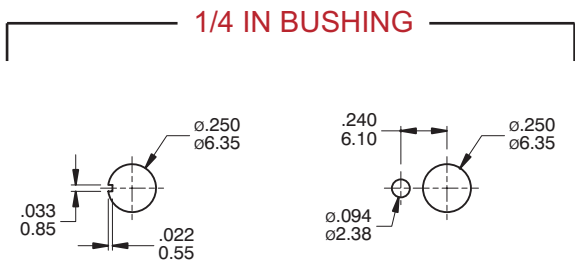


**METRIC BUSHING**




**15/32IN BUSHING**

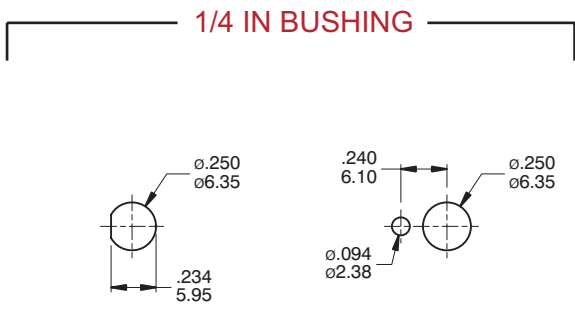

**METRIC BUSHING**




**15/32IN BUSHING**




**TERMINATION OPTIONS**

**M1 SOLDER LUG**




.030(0.76) THK.

**M2 PC THRU-HOLE**




.030(0.76) THK.

**M3 QUICK CONNECT**

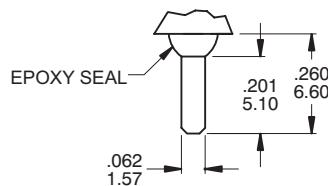

THK .030(0.76)

**M5 WIRE WRAP**



THK .030(0.76)

**OTHER TERMINATION OPTIONS**



- M6 RIGHT ANGLE P.C. MOUNT
- M7 RIGHT ANGLE P.C. MOUNT
- VS2 VERTICAL BRACKET P.C. MOUNT
- VS3 VERTICAL BRACKET P.C. MOUNT
- VS5 VERTICAL BRACKET P.C. MOUNT

RE Mating Quick Connector  
Amp P/N 60900-1


OPTION CODE	DIM. 'A'
M5-1	.736 (18.70)
M5-2	.953 (24.20)
M5-3	.415 (10.55)
M5-4	1.062 (26.97)



M6

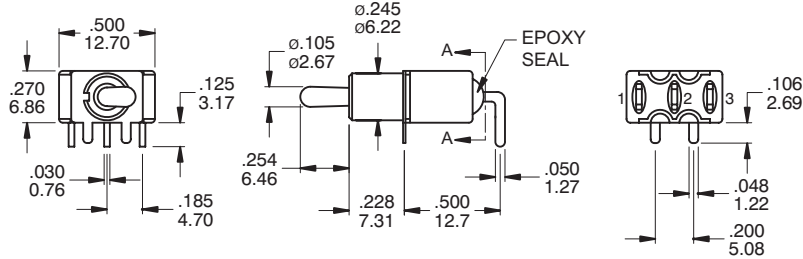

P.C. MOUNTING




SECTION A-A  
TERM. NOS. FOR  
REFERENCE ONLY


SPDT

Part No. Shown : 1MS1T2B4M6QE

M6

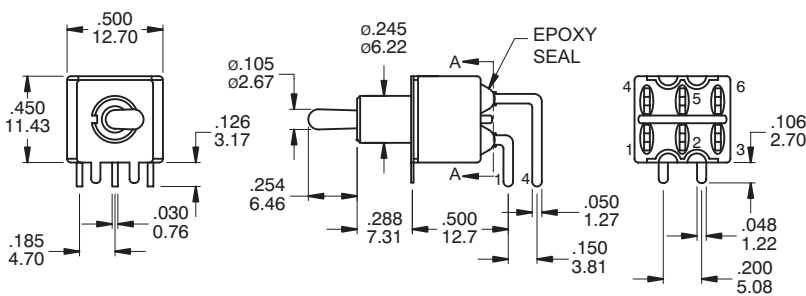

P.C. MOUNTING


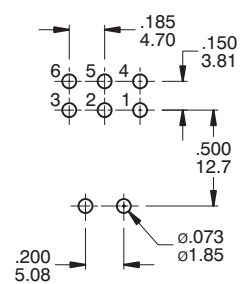


SECTION A-A  
TERM. NOS. FOR  
REFERENCE ONLY


DPDT

Part No. Shown : 1MD1T2B4M6RE

M7

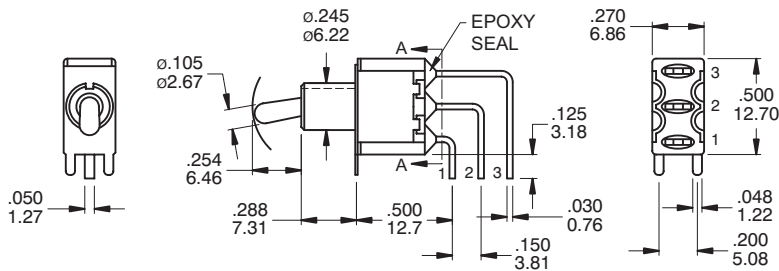

P.C. MOUNTING


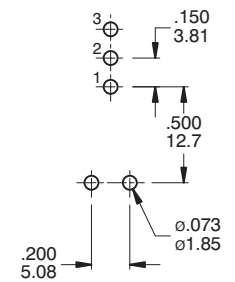


SECTION A-A  
TERM. NOS. FOR  
REFERENCE ONLY


SPDT

Part No. Shown : 1MS1T2B4M7QE

M7

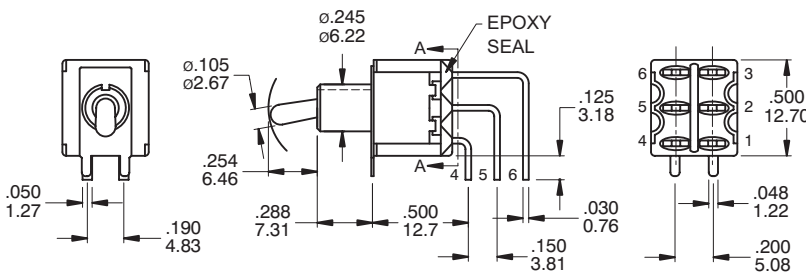

P.C. MOUNTING

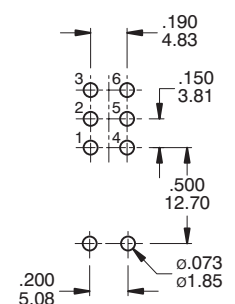



SECTION A-A  
TERM. NOS. FOR  
REFERENCE ONLY

DPDT

Part No. Shown : 1MD1T2B4M7QE




**M7**

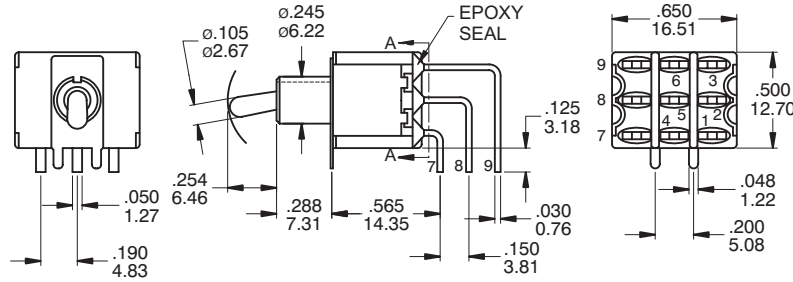



**3PDT**

Part No. Shown : 1M31T2B4M7QE

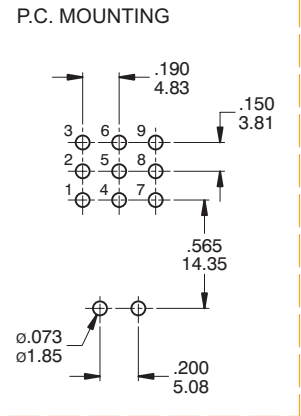


**M7**

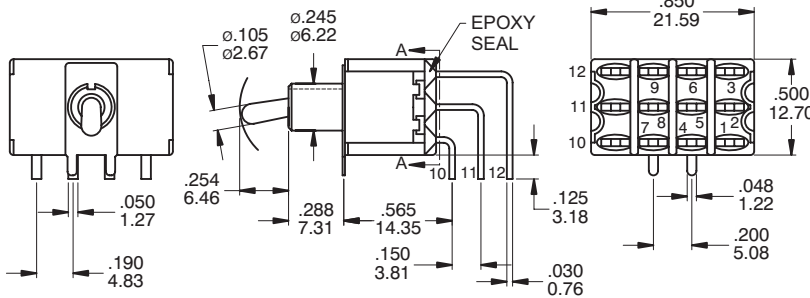


**4PDT**

Part No. Shown : 1M41T2B4M7QE

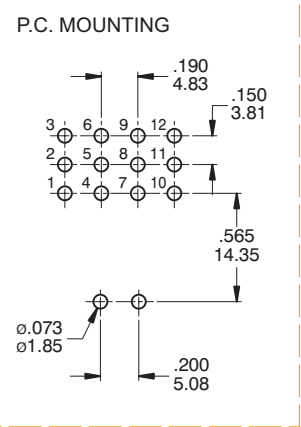


**VS2 - VS3**

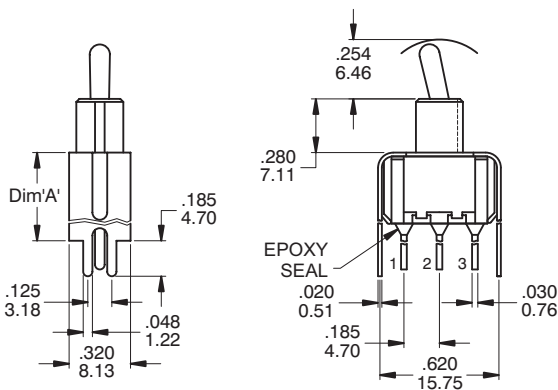


OPTION CODE	DIM. 'A'
VS2	.460 11.68
VS3	.630 16.00

**SPDT**

Part No. Shown : 1MS1T2B4VS2QE

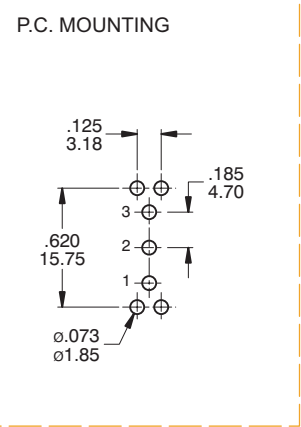


**VS2 - VS3**

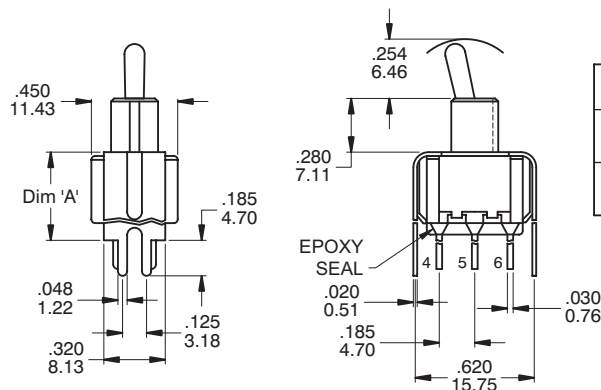


OPTION CODE	DIM. 'A'
VS2	.460 11.68
VS3	.630 16.00

**DPDT**

Part No. Shown : 1MD1T2B4VS3QE

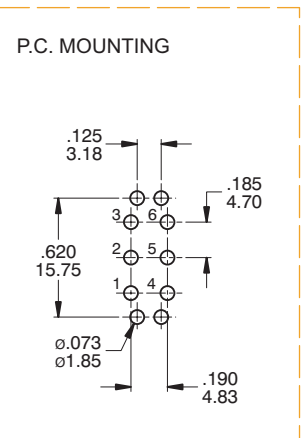


VS5

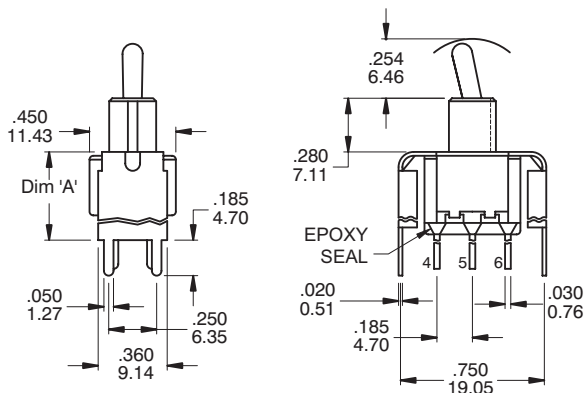

OPTION CODE	DIM. 'A'
VS4	.460 11.68
VS5	.630 16.00

P.C. MOUNTING





DPDT


Part No. Shown : 1MD1T2B4VS5QE

## SNAP-IN TERMINATION OPTIONS

M6N




V2N




## HARDWARE

1/4 NUTS HDW2




Supplied standard with B1, B3, B5, B6 and B9 options

DRESS NUT HDW3




METRIC NUT HDW6




Supplied standard with B8 metric bushing

LOCK WASHER HDW11




Supplied standard with B1 / B3 bushing

OPTIONAL RUBBER HOOD SEALING

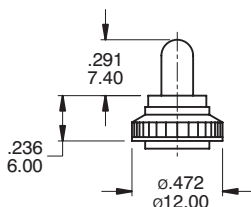


K1=Metric  
E1=Inch (Std.)  
for actuator T1, T2 and  
B1, B3, B5, B6 Bushing only

15/32 NUTS HDW4

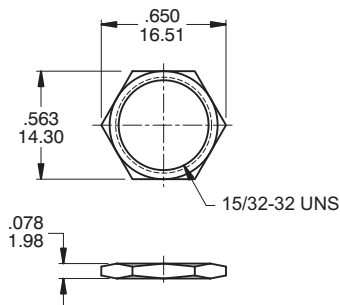


Supplied standard with B13 bushing



Supplied standard with B13 bushing


# Miniature Toggle Switches **1M SERIES**

**HDW15**

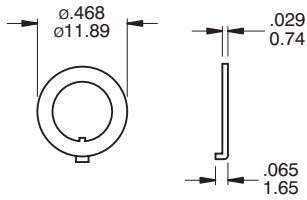


Locking ring supplied standard

**HDW16**




Locking ring supplied with B5 bushing

**HDW17**

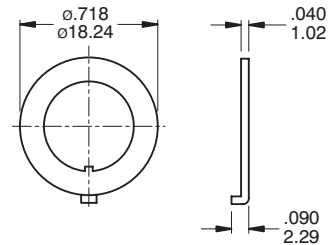


Locking ring supplied with B13,B18,B20 bushing

**HDW18**

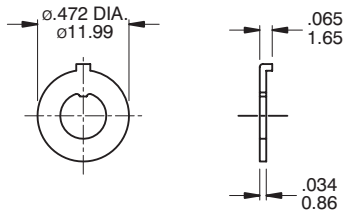


Locking ring supplied with B8 bushing

**HDW19**

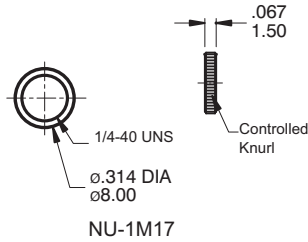

NU-1M17


**HDW20**

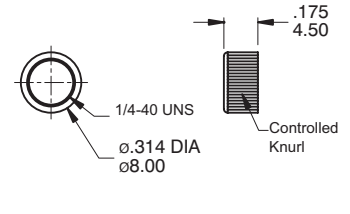

NU-1M24

## OPTIONAL TOGGLE CAP

**CP-1T1X**




Use with T1

**CAP Color :**

ITEM NO	COLOR
1	White
2	Black (Std)
3	Red
4	Orange
5	Yellow
6	Green
7	Blue
8	Brown
9	Gray

**CP-1T2X**



Use with T2

**CAP Color :**

ITEM NO	COLOR
1	White
2	Black (Std)
3	Red
4	Orange
5	Yellow
6	Green
7	Blue
8	Brown
9	Gray

## CONTACT MATERIAL OPTIONS

	CONTACT MATERIAL	TERMINAL PLATING	RATINGS
<b>Q</b>	Silver	Q = Silver	5 Amps with resistant load @ 120VAC or 28VDC 2 Amps with resistant load @ 250VA
<b>S</b>		S = Silver,pure - tin	
<b>C</b>	Gold over Silver	C = Gold over silver	
<b>K</b>		K = Gold over silver,pure - tin	
<b>R</b>	Gold	R = Gold	0.4 Volt - Amps ( VA ) max. @ 20V max. ( AC or DC )
<b>G</b>		G = Gold,pure - tin	



## SOLDERING PROCESSES

**MANUAL SOLDERING :** Use soldering iron of 30 watts, controlled at 350°C approximately 5 seconds while applying solder.

**WAVE SOLDERING :** Recommended Soldering Temperature : 260 ± 5°C  
Duration of Solder Immersion : 5 ± 1 seconds  
(PCB is 1.6mm in thickness)

**SOLDERING : Vapor phase**

