
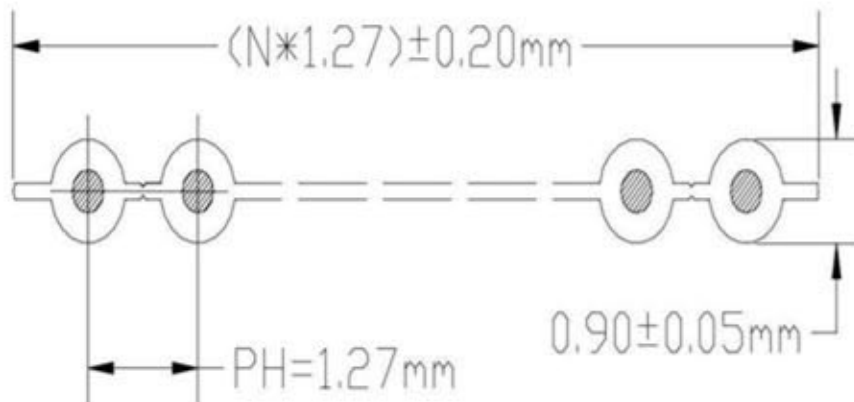


CONSTRUCTION ITEM		NPIN
CONDUCTOR	SIZE	28AWG
	MATERIAL	TC
	CONSTRUCTION	7/ Φ 0.125 \pm 0.008mm
JCAKET	AVG. THICK	0.26mm
	MIN. THICK	0.18mm
	MATERIAL	45P 105°C UL-PVC All raw materials meet RoHS standards
	DIAMETER	0.90 \pm 0.05 \times (1.27*N) \pm 0.20mm PH=1.27mm
	COLOR	GRAY#-PINK (HALF ATOMIZER)
MARKING	MARKING NO.	 AWM 2651 VW-1 105°C 300V 28AWG
	COLOR	BLACK


ELECTRICAL CHARACTERISTICS

1. Conductor Resistance: AT 20°C Max: 28AWG 237.25 Ω /KM
2. Insulation Resistance: AT 20°C Min: 10M Ω /KM
3. Dielectric Strength: AC2000V 60HZ/min



**RoHS
Compliant**



APPD.		TOLERANCE	PART NAME
DWG.	SCALE	0.00 * ANG. *	FLAT CABLE 1.27mm UL2651 XXP 28AWG GREY 1 ROLL=100F ROHS
DATE	UNIT	SIZE: A4	PART NO.
2012/05/11	M M	REV. B	FLC-XX/30-E
	PAGE 1 OF 1		