



Cat. 5e Modular Plug, Toolless

Part no.: MP0026

Technical Features


Cat. 5e UTP Modular Plug, Toolless

Round Cable O.D.: max. 5,3mm

For AWG 24-26 solid or stranded wire

Color: White

Technical Drawings

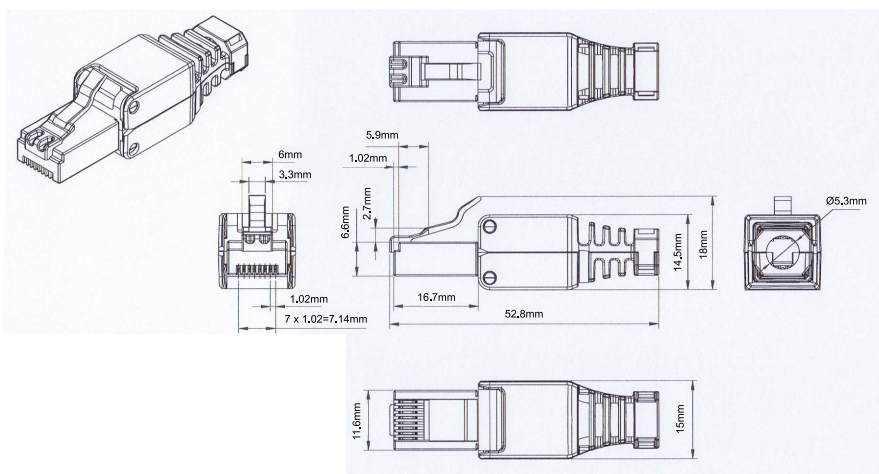

Electrical

1. Voltage Rating: 125 VAC RMS
2. Current Rating: 1.5AMP
3. Contact Resistance: 100MILLIOHMS MAX
4. Insulation Resistance: 1000 MEGOHMS MIN @500VDC
5. Dielectric Strength: 750 VAC RMS 60Hz, 1MIN

Environmental

1. Storage: -40°C~85°C
2. Operation: 0°C~70°C

Mechanical

1. Housing Material: PC
2. Insert Material: Flame Retardancy PBT
3. PCB Material: FR-4 T=1.6mm
4. Contact Material: Phosphor Bronze
Stamp PIN T=0.30mm
5. RJ45 Jack; Life:750 FTIMES MIN
6. Wire: AWG 24-26

MP0026



4 052792 046878

Made in China

www.logilink.de



RoHS
compliant



* The specifications and pictures are subject to change without notice.
*All trade names referenced are the registered trademark of their respective owners.

Package Contents

1 x Cat. 5e Modular Plug, Toolless

Packaging Informations

Packing Dimension	100 x 70 x 15mm
Packing Weight	0.01kg
Carton Dimension	620 x 420 x 230mm
Carton Q'ty	1000pcs
Carton Weight	9.5kg



MP0026



4 052792 046878

Made in China

www.logilink.de



RoHS
compliant



* The specifications and pictures are subject to change without notice.
*All trade names referenced are the registered trademark of their respective owners.