

HNS L 55 W 2G11

PURITEC HNS UV-C | UV-C lamps for purification



Areas of application

- Efficient disinfecting of air, water and surfaces

Product family benefits

- Effective and environment-friendly disinfection without chemicals
- Low mercury content
- Long lifetime due to specific coating
- Ozone-free

Product family features

- Dominant wavelength: 254 nm (OFR version)



Product datasheet

Technical data

Product information

Order reference	HNS-L 55W 101V
-----------------	----------------


Electrical data

Nominal voltage	101 V
Lamp voltage	101 V
Construction voltage	101.00 V
Nominal current	0.55 A
Lamp current	0.55 A
Nominal wattage	55.00 W

Photometrical data

Luminous intensity	7800 cd
Radiated power 200...280 nm (UVC)	17 W

Dimensions & weight

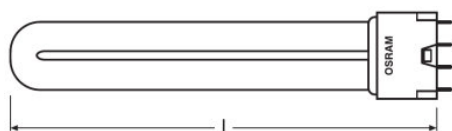

Diameter	40.0 mm
Length	533.0 mm

Lifespan

Lifespan	9000 h
----------	--------

Additional product data

Base (standard designation)	2G11
-----------------------------	------

Capabilities

Burning position	s180
------------------	------

Product datasheet

Country specific categorizations

Order reference	HNS-L 55W 101V
-----------------	----------------

HNS L 55 W 2G11

PURITEC HNS UV-C | UV-C lamps for purification

Product name	Product name ECG	EAN
HNS L 55 W 2G11	QTP-DL 2x55 GII	4008321390172

Product datasheet

Safety advice

PURITEC germicidal lamps emit high-intensity UV radiation that can cause sunburn and conjunctivitis. The skin and eyes must therefore not be exposed to direct or reflected unfiltered radiation.

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899012394	HNS L 55 W 2G11	Folding carton box 1	46 mm x 26 mm x 565 mm	0.68 dm ³	167.00 g
4052899012400	HNS L 55 W 2G11	Shipping carton box 10	136 mm x 103 mm x 578 mm	8.10 dm ³	2173.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.
