

## ◆ Features:

- beam angle 170°
- for free connection
- IP 20 protection,
- built-in constant current circuit
- built-in heat skin plate
- 5 years warranty

## ◆ Applications:

- backlighting of furniture
- advertising boxes with a depth of 40-120mm

## ◆ Photos:



CE






# RB-3030-Yx-LENS170


		RB-3030-3x-LENS170	RB-3030-6x-LENS170	RB-3030-12x-LENS170
Power	Rated voltage	24Vdc +/- 5%		
	Power consumption	3,6W	7,2W	14,4W
	Current consumption of one module	0.15A	0.3A	0.6A
	Max QTY/Serie	12 pcs.	6 pcs.	3 pcs.
LEDs	Dimensions of LEDs	3030		
	Number of diodes in module (Y)	Y = 3	Y = 6	Y = 12
	Color of Light	X = W-white (6000-8000K), Typical 7000K X = NW- 4000K X = WW- 3000K x - CW- 9000K		
	Flux	W- 285 lm	W- 575 lm	W- 1100 lm
	Luminous efficacy	79 lm/W		
	Beam angle	170°		
	Lifetime	50 K hours		
	Properties	Protection	IP 20	
Working temperature		-25°C ... +55°C		
Dimensions	Height, width, length	7,2 x 20 x 240 mm	7,2 x 20 x 480 mm	7,2x20x960 mm
Montage	Bonding	Yes		
	Screwing	Yes		
	Hole size	M3		
Others	Housing material	Aluminium		
	Number of modules per 1mb	4 pcs.	2 pcs.	1 pcs.
Packing	Dimensions	65x31x30 cm	65x31x30 cm	124x20x20 cm
	Tray	48 pcs.	24 pcs.	12 pcs.
	Box	480 pcs.	240 pcs.	60 pcs.

## ◆ DIMENSIONS

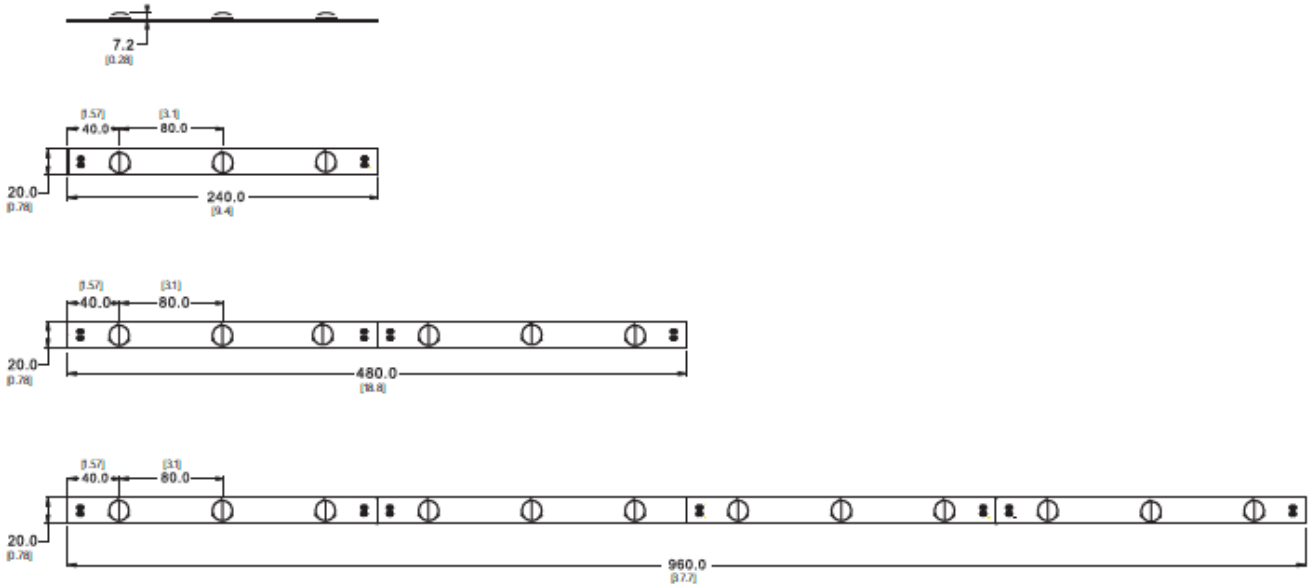

Dimensions: mm

## ◆ BEAM ANGLE

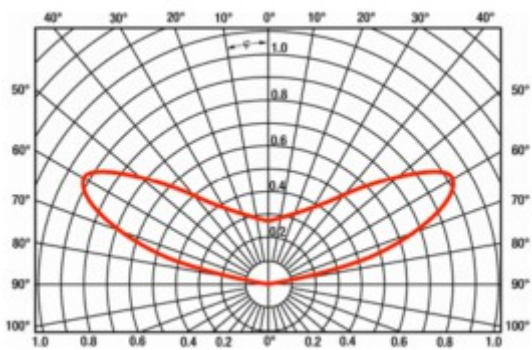

## ◆ CONNECTOR

plug	5557-2P	
socket		