Ninigi

D A T A S H E E T

Specification:

Contact: Brass (CuZn), Cu/Ni, tin plated
Terminal screw: Steel galvanized and chromatized
Insulator: Poly Butylene, Terephthlene,
PBT (30% Glass Filled) (UL94V-0)
Operating temperature: -30°C to 120°C
Current rating: 8 A
Resistance to tracking: 5 MW
Insulation withstanding voltage: 1500 VAC min.
Rated voltage: 300 V

TB-5.0-P-2P-SPR-BK

Colour:
none - blue
GY - gray
BK - black
Screwless
No. of Poles:
N - max. 24
Front Wire Inlet Type:
P - Push Button Type
Pitch:
5.0 - 5.0 mm
10 - 10.0 mm
Terminal Block

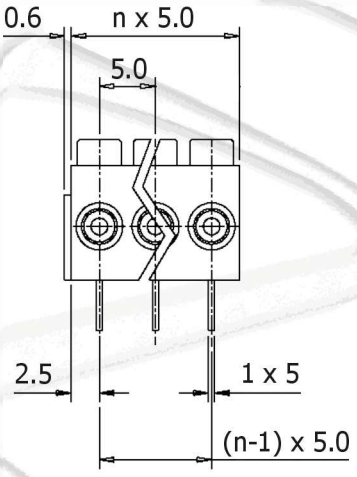

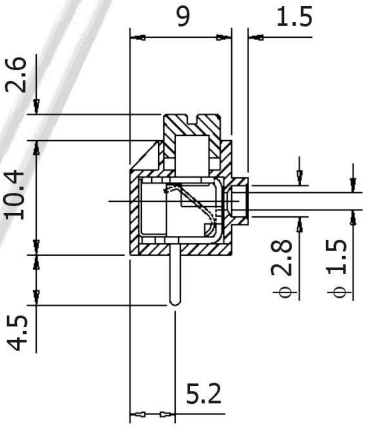



Recommended PCB holes diameter: f 1.2 mm to f 1.4 mm