

STARWIRE LIGHTING CO.,LIMITED

Product Sepcification

***Product Name: LED Dimmer(12VDC/24VDC)**

***Item No: SW-DM1**



***Summarization**

Dimmer is a controller that it can adjust brightness infinitely,its control mode is knob-operated control, you could adjust light to the appropriate lighting brightness in accordance with your actual need.


***Technical Parameters**

- Working temperature: -20-60 ℃
- Supply voltage: DC12V
- Output: 1 channel
- External dimension: L89 X W59 X H35 mm
- Packing size: L96 X W64 X H65 mm
- Net weight: 85 g
- Gross weight: 110 g
- Static power consumption: <1 W
- Output current: <8 A
- Power output: 96 W

STARWIRE LIGHTING CO.,LIMITED

Product Sepcification

***Dimension Drawing**

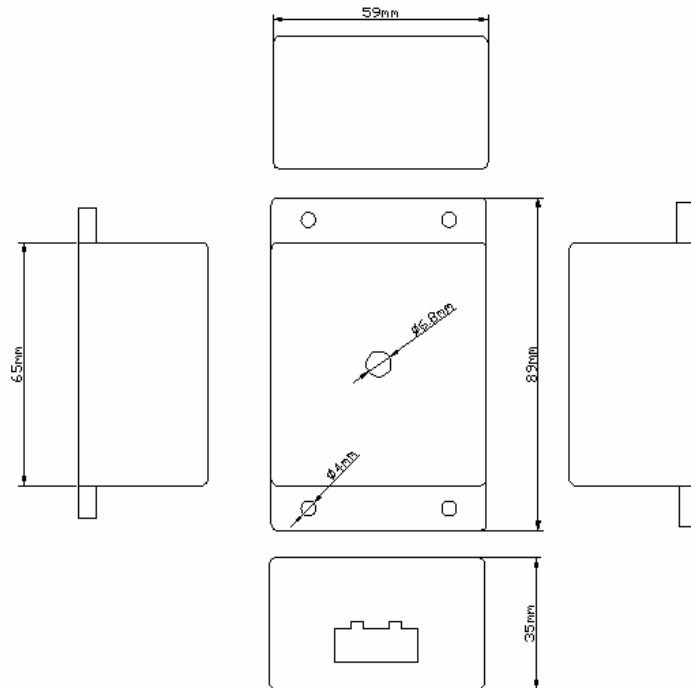


Notes;

- 1, All dimmension units are millimeters
- 2,All dimension tolerance is $\pm 1\text{mm}$ unless otherwise noted.


*** Interface specifications:**

Power input interface:



Adopt male and female connector with screw.

Load output interface:



Adopt male and female connector with screw.

STARWIRE LIGHTING CO.,LIMITED

Product Sepcification

*** Direction for use**

1. Connect the load wire at first, following by the power wire; Please ensure short circuit can not occur between connecting wire before you turn on the power;
2. Adopt rotary button,its function as follows:
Rotate button to the right,brightness will be brighter,when you rotate it to the far right,the brightness is greatest.
Rotate button to the left,brightness will be darker,when you rotate it to the far left,the light will be turned off.

*** Typical Applications**

